
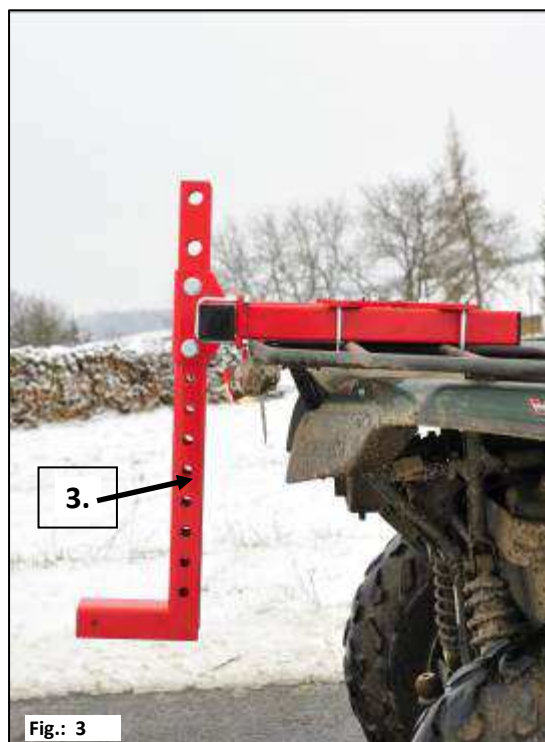
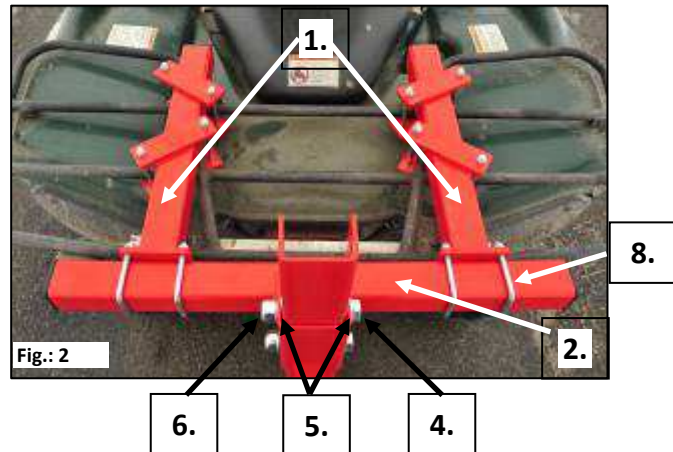


Installation instructions, quad bracket (height adjustable)

The height-adjustable quad bracket consists of the following parts:

| | |
|---|---------|
| 1. Fastening strut | 2 units |
| 2. Mounting frame | 1 unit |
| 3. Fastening frame | 1 unit |
| 4. M16x100 bolt | 2 units |
| 5. M16 washer | 4 units |
| 6. M16 lock nut | 2 units |
| 7. Fastening plate | 8 units |
| 8. U-bolt fasteners (including 8 x M8 lock nuts) | 4 units |
| 9. M8x100 hexagonal bolt | 8 units |
| 10. M8 lock nut | 8 units |

The height-adjustable quad bracket is fitted as follows:

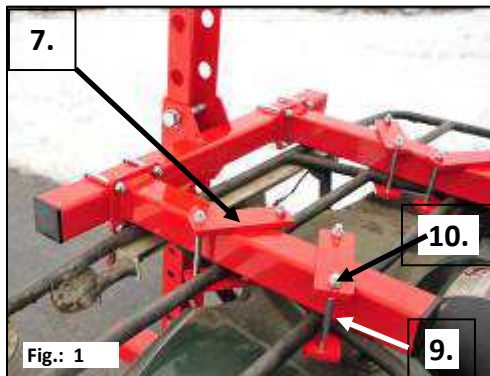

The holes on the fastening frame (fig.: 3) can be used to select the fitting surface height (fig.: 4 & 5).



ATTENTION: WD devices must be fitted as deeply as possible.



ATTENTION: The lighting and registration plate must always be clearly visible on public roads.

Combination possibilities:

| Device type | Permitted / possible | |
|-------------------|----------------------|----|
| KS 40 M2 | YES | |
| ES 100 M1 Classic | YES | |
| ES 100 M2 Special | YES | |
| ZS 200 M3 | | NO |
| WD 40 M2 | YES | |
| WD 100 M3 | YES | |
| WD 250 M2 | | NO |